

SPECIFICATIONS					1/12	
1、 Scope of Application					Reference	
These specifications apply to chip type LED lamp, CITELED, model					CL-395S-E8-SD-T	
2、 Part code						
CL — 395S — E8 — SD — I						
Series						
395S : Multi-color Top-emitting type						
Lighting color						
E8 type						
R : High brightness Red						
G : High brightness Green						
B : High brightness Blue						
Diffusion						
SD : Diffused						
Shipping mode						
T : Taping (standard)						
Non-coded : Bulk						
MODIFICATION HISTORY						
					APPROVED	CHECKED
					T.Mizuno	—
						M.Hamada
— Jun.2.26 Issue of the first edition hamada						Drawing No
MARK QTY DATE DESCRIPTION NAME					CITIZEN ELECTRONICS CO., LTD.	

SPECIFICATIONS


2/12

3、 Outline drawing

Unit: mm

Tolerance: ± 0.1

Reference

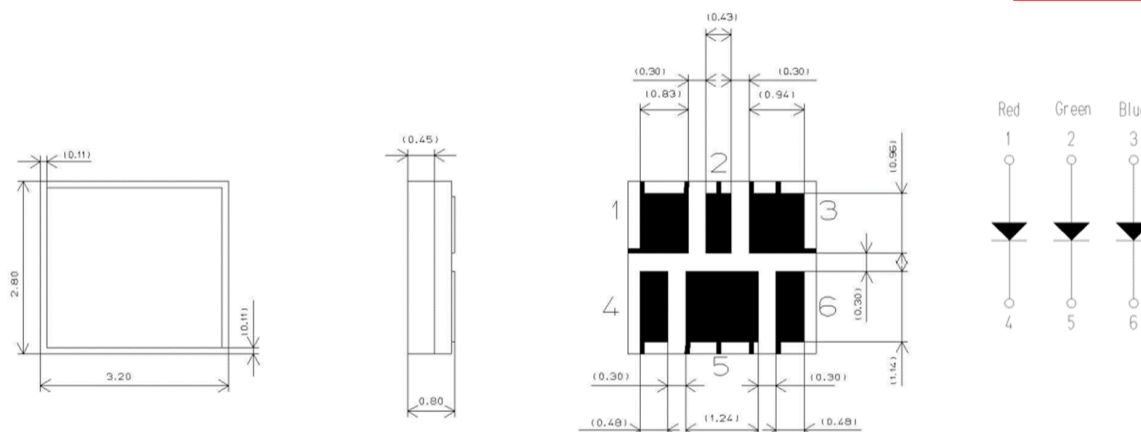

* Dimensions in parentheses are reference values.

4、Performance

(1) Absolute Maximum Rating

(T_g=25°C)

Parameter	Symbol	Red	Green	Blue	Unit
Total Value of Power Dissipation	P^1	288			mW
Power Dissipation	P_d	90	130	131	mW
Single color forward current	I_F	40	40	40	mA
Simultaneous lighting forward current	I_F	40	40	35	mA
Forward Pulse Current	I_{FP}^{*2}	100	100	100	mA
Reverse Current	V_R	10	5	5	mA
Operating Temperature	T_{OP}	-25 ~ +80			°C
Storage Temperature	T_{ST}	-30 ~ +85			°C

* P means the Total Value of Power Dissipation when both colors are ON.

^{*2} Duty < 1/10, Pulse width < 0.1 msec

(2) Electro-optical Characteristic

($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Color	Condition	MIN	TYP	MAX	Unit
Forward Voltage	V_F	R	$I_F=36mA$	-	1.89	2.57	V
		G	$I_F=32mA$	-	2.75	3.97	
		B	$I_F=34mA$	-	2.81	3.83	
Reverse Current	I_R	R	$V_R=10V$	-	-	1	μA
		G	$V_R=5V$	-	-	2	
		B	$V_R=5V$	-	-	2	
Luminous Intensity	I_V	R	$I_F=36mA$	-	1916	-	mcd
		G	$I_F=32mA$	-	4583	-	
		B	$I_F=34mA$	-	1198	-	
Dominant Wavelength	λ_d	R	$I_F=36mA$	-	620	-	nm
		G	$I_F=32mA$	-	526	-	
		B	$I_F=34mA$	-	470	-	

Note 1) The measurement tolerance of forward voltage is $\pm 3\%$ at our tester.

Note 2) The measurement tolerance of luminous intensity is $\pm 10\%$ at our tester.

Note 3) The measurement tolerance of dominant wavelength is 2 nm at our tester.

Note 4) Please be aware that the above electro-optical characteristics are achieved when applying the current values shown in the table.

Please consult us when this product is used under any other conditions.

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITIED
					T.Mizuno	—	M.Hamada	TYPE	CL-395S-E8-SD-T
—		Jun.2'26	Issue of the first edition	hamada				Drawing No	—
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

CITIZEN ELECTRONICS CO., LTD.


Format No. OQP-0002-F38-I-E

SPECIFICATIONS

CL-395S-E8-SDRank

IF=R : 36mA
IF=G : 32mA
IF=B : 34mA

Chromaticity coordinates

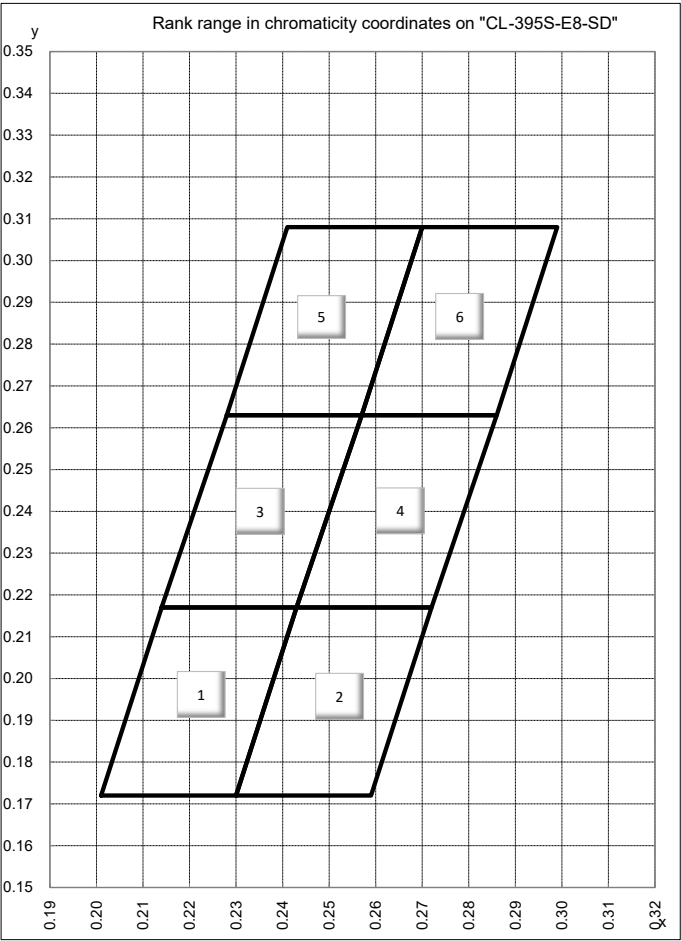

◆Chromaticity Rank

Rank1	x	y
a	0.201	0.172
b	0.214	0.217
c	0.243	0.217
d	0.230	0.172

Rank2	x	y
a	0.230	0.172
b	0.243	0.217
c	0.272	0.217
d	0.259	0.172

Rank3	x	y
a	0.214	0.217
b	0.228	0.263
c	0.257	0.263
d	0.243	0.217

Rank4	x	y
a	0.243	0.217
b	0.257	0.263
c	0.286	0.263
d	0.272	0.217

Rank5	x	y
a	0.228	0.263
b	0.241	0.308
c	0.270	0.308
d	0.257	0.263

Rank6	x	y
a	0.257	0.263
b	0.270	0.308
c	0.299	0.308
d	0.286	0.263

※Chromaticity coordinates are within the area surrounded by a, b, c and d.
(Tolerance ±0.01)

◆Luminous intensity rank














A	min	max
	8711	10298
B	min	max
	7124	8711
C	min	max
	5537	7124

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
					T.Mizuno	—	M.Hamada	TYPE	CL-395S-E8-SD-T
								Drawing No	—
—	—	Jun.2.26	Issue of the first edition	hamada					
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				


SPECIFICATIONS

Reference

5、Characterist (Typical characteristics)

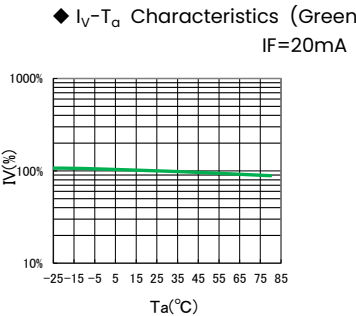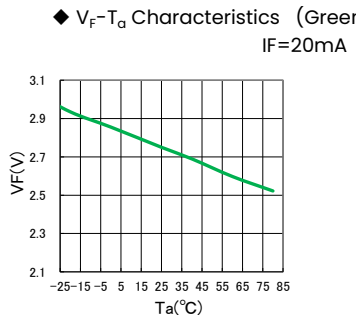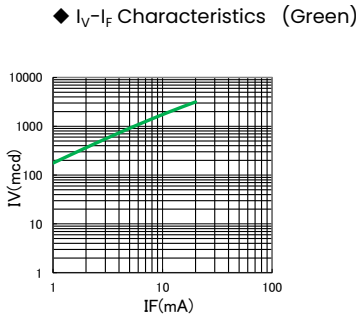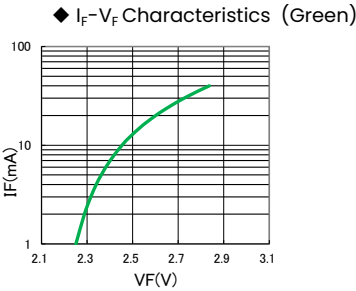


◆ P- T_a Characteristics

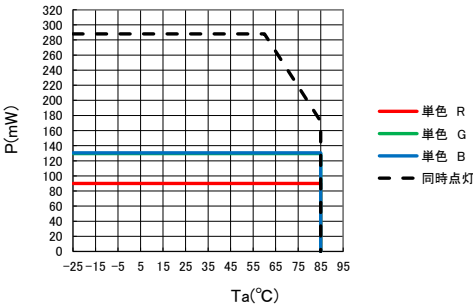


MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
					T.Mizuno	—	M.Hamada	TYPE	CL-395S-E8-SD-T
—		Jun.2.26	Issue of the first edition	hamada				Drawing No	—
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

SPECIFICATIONS

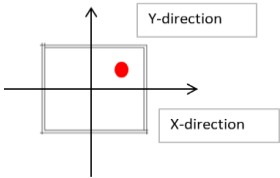


Reference


◆ Directive Characteristics Red(x)

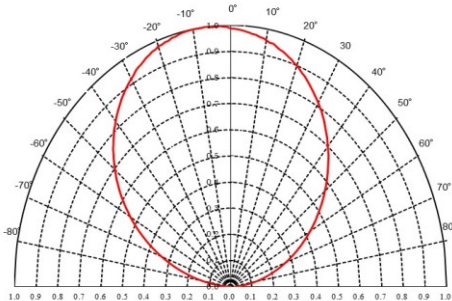


◆ Directive Characteristics Red(y)

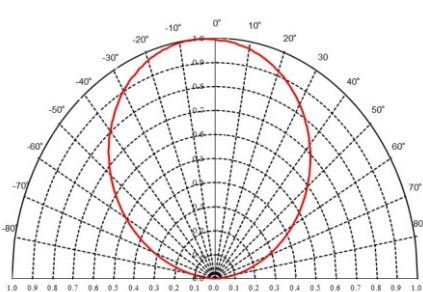


◆ Directive Characteristics Green(x)

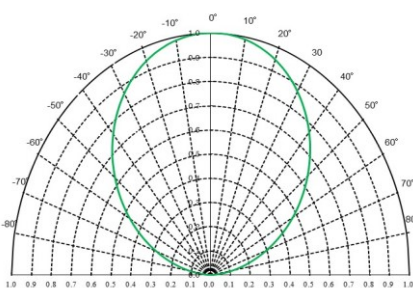


◆ Directive Characteristics Green(y)

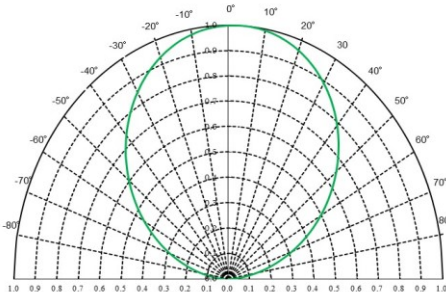

◆ Directive Characteristics Blue(x)

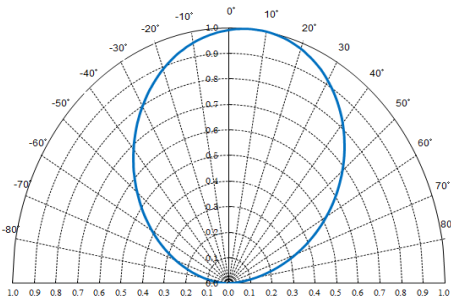

◆ Directive Characteristics Blue(y)

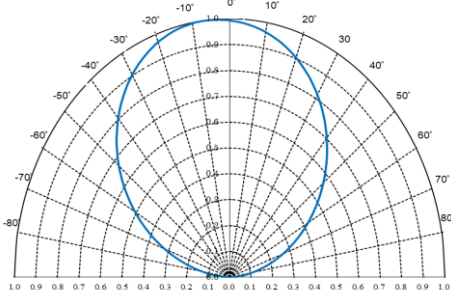

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
					T.Mizuno	—	M.Hamada	TYPE	CL-395S-E8-SD-T
—		Jun.2.26	Issue of the first edition	hamada				Drawing No	—
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

SPECIFICATIONS

6/12

Reference

6、Reliability

(1) Details of the tests (With one of the three die emitting)

Test Item	Test Condition
Life Test in Continuous Operation	To operate the test under absolute maximum current rating at $25 \pm 3^{\circ}\text{C}$ for 500^{+24}_{-12} hours
Low Temperature Storage Test	$-40^{+3}_{-5}^{\circ}\text{C} \times 1000^{+24}_{-12}$ hours
High Temperature Storage Test	$100^{+5}_{-3}^{\circ}\text{C} \times 1000^{+24}_{-12}$ hours
Moisture-proof Test	$85 \pm 2^{\circ}\text{C}$, $85 \pm 5\% \text{ RH}$ for 1000^{+24}_{-12} hours
Thermal Shock Test	$-30^{\circ}\text{C} \times 30 \text{ minutes} \sim 85^{\circ}\text{C} \times 30 \text{ minutes}$, 100-cycle
Solder Heat Resistance Test	Recommended temperature profile (reflow soldering) $\times 2$, (2 nd test must be started after the samples are stabilized thermally.)

(2) Judgment Criteria of Failure for Reliability Test

Measuring Item	Measuring Condition				Judgement Criteria for Failure
	Symbol	Red	Green	Blue	
Forward Voltage	$V_F(\text{mA})$	36	32	34	$> U \times 1.2$
Reverse current	$I_R(\text{V})$	10	5	5	$< S \times 2$
Luminous Intensity	$I_V(\text{mA})$	36	32	34	$< S \times 0.5$

U means the upper limit of the specified characteristics.

S means the initial value.

Note: Measurement shall be taken between 2 hours and 24 hours, having returned the test pieces to the normal ambient conditions after the completion of each test.

(3) Influence with static electricity

This product is susceptible to accumulation of static electricity and surge voltage, which may decrease reliability or result in damage to LED dies.

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
—		Jun.2.26	Issue of the first edition	hamada	T.Mizuno	—	M.Hamada	TYPE	CL-395S-E8-SD-T
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

Format No. OQP-0002-F38-I-E


SPECIFICATIONS

Reference

7、Taping Specifications (in accordance with JIS standard)


(1) Shape and Dimensions of Reel

(Unit: mm)

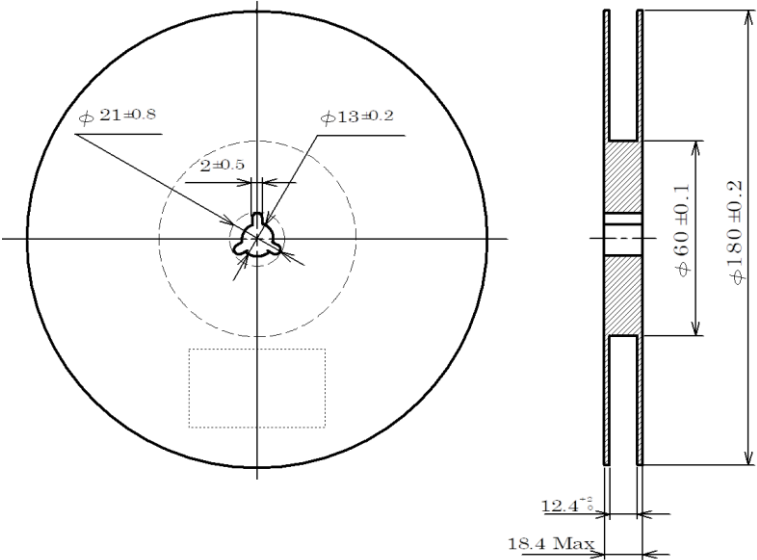


(Unit: mm)

(2) Dimensions of Tape

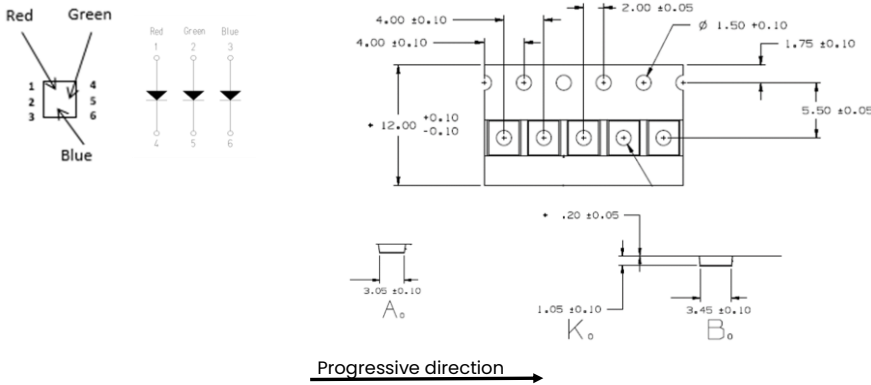

* Dimensions in parentheses are reference values.

(3) Configuration of Tape

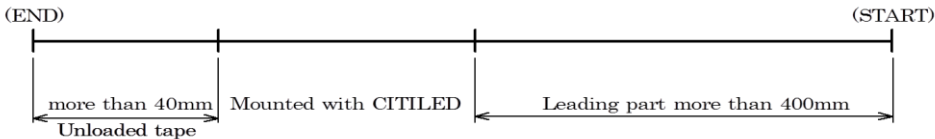

(4) Quantity 2,500 pcs/reel

(Please note that the shipping quantity of this product may be less than 500 pieces per reel (minimum quantity: 500 pieces) depending on the shipping quantity, shipping delivery date and other conditions. However, in this case, we will notify you in advance.)

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITELED
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

SPECIFICATIONS


8/12

Reference

8、Packing Specifications

(1) Moisture-proof Packing

To prevent moisture absorption during transportation and storage, reels are packed in aluminum envelopes.

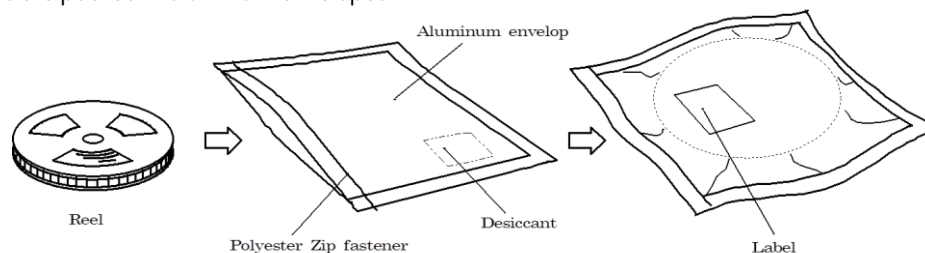

(2) Storage

To prevent moisture absorption, it is strongly recommended that reels (in bulk or taped) should be stored in the dry box (or the desiccator) with a desiccant as the appropriate storage place. If not, the following is recommended.

Temperature : 5~30°C

Humidity : 60%RH max.

The devices should be mounted as soon as possible after unpacking. If you store the unpacked reels, please store them in the dry box or seal them into the envelop again.

(3) Baking

After the storage period

(6 months in moisture proof packaging, or 7 days after unpacking moisture proof packaging), please bake the goods before use under the conditions described below.

Baking conditions : 60 °C × 12 hours or more (reeled one)

100 °C × 45 minutes or more (loose one)

Baking times : Up to one time

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITIED
								TYPE	CL-395S-E8-SD-T
					T.Mizuno	—	M.Hamada	Drawing No	—
—		Jun.2.26	Issue of the first edition	hamada					
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

Format No. OQP-0002-F38-T-E

SPECIFICATIONS

9/12

Reference

9、Precautions


9-1、Soldering

(1) Manual soldering

- 1) Solder of 96.5Sn 3Ag 0.5Cu is recommended.
- 2) Bake the goods before manual soldering,
because otherwise it may cause resin to crack on account of moisture absorption.
- 3) Use a soldering iron of 25W or smaller. Adjust the temperature of the soldering iron below 350°C.
- 4) Force or stress must not be applied to the resin portion while soldering.
- 5) Finish soldering within 3 seconds.
- 6) Handle the devices only after temperature is cooled down.

(2) Lead free soldering

- 1) Following soldering paste is recommended
Melting temperature : 216 ~ 220°C
Composition : 96.5Sn 3Ag 0.5Cu
- 2) The temperature profile at the top surface of the parts is recommended as shown below.
- 3) It is requested that products should be handled after their temperature has dropped down to the normal room temperature.

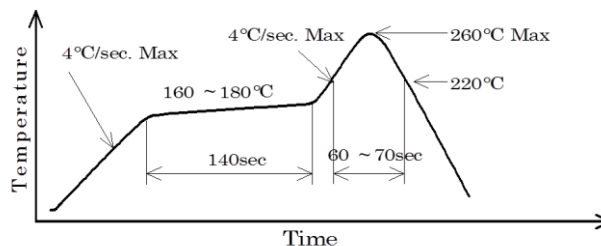

Reflow soldering of the above profile is allowed two times.

(3) Caution

- 1) Reflow soldering is allowed up to two times, and manual soldering up to one time.
- 2) When conducting reflow twice,
please shorten the interval between the first and second reflow to prevent moisture absorption.
Also, please cool (naturally) the product to the room temperature after the first reflow to start the second reflow.
- 3) Make sure to avoid rapid cooling so that the temperature gradient from the peak temperature is gentle.
- 4) Air reflow may cause an optical deterioration because of heat in the reflow and impact of atmosphere.
Nitrogen reflow is recommended.
- 5) It is not recommended to repair the product after soldering.
- 6) When soldering, please do not apply stress to LED while it is heated.

9-2、Handling precautions

- (1) Please avoid any stress added to the resin portion while it is heated.
- (2) Please avoid any friction by sharp metal nail etc. to the resin portion.
- (3) Please avoid handling the product with bare hands.
- (4) Please avoid applying any pressure to the product.
- (5) Please avoid stacking PCBs after mounting.
- (6) Please take countermeasures against static electricity to the same degree as those used for CMOS LSI.

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
								TYPE	CL-395S-E8-SD-T
					T.Mizuno	—	M.Hamada	Drawing No	—
—		Jun.2.26	Issue of the first edition	hamada					
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

SPECIFICATIONS


10/12

Reference

10、Designing precautions

- (1) The current limiting resistor should be placed in the circuit so that is driven within its rating.
Also avoid reverse voltage (over-current) applied instantaneously when ON or OFF.
- (2) When pulse driving current is applied, average current consumption should be within the rating.
Also avoid reverse voltage applied when put off.
- (3) Recommended soldering pattern

<For reflow soldering>

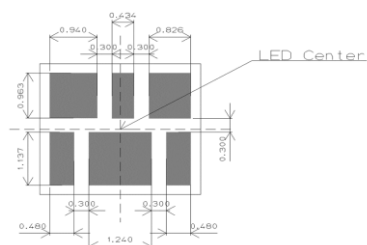

Unit:mm

The above dimensions are not the one which guarantee the performance of mountability.

The use of the above pattern is recommended to use after deep study at your site.


Recommended land pattern has only a land size on which LED can be mounted without problem.
If mounting accuracy is required for a high-density mounting,
please choose a land pattern that suits it.

- (4) When assembling the circuit board into the finished products,
care must be taken to avoid the component parts from touching other parts.
- (5) When using multiple LEDs, it is required to connect a current limiting resistor on
each path which the current flows to the LEDs.


(ex-1)



(ex-2)



(ex-3)



11、How to use

- (1) Please use forward current for the product.
Make sure that no forward or backward voltage is applied when it is not lighting.
Please avoid applying backward voltage continuously because
it may cause migration and damage dice.
- (2) Please avoid applying excess voltage such as lighting surge to LED.
- (3) The service life may become shorter in areas where hydrogen sulfide is generated
(such as near a hot spring or a volcano)
or there is a lot of salt (such as near the coast).
- (4) Please consider generation of heat when using this product.

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
—		Jun.2.26	Issue of the first edition	hamada	T.Mizuno	—	M.Hamada	TYPE	CL-395S-E8-SD-T
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

Format No. OQP-0002-F38-T-E

SPECIFICATIONS

11/12

Reference

12、Cleaning

- (1) Please do not wipe LED.
- (2) A cleaning agent may damage the package and resin to cause malfunctioning.
Before use, make sure it will not affect the goods.
- (3) Ultrasonic cleansing is not recommended.

13、Other precautions

- (1) Warranty period is half a year from the day we delivered the product.
- (2) If any defect is found during the warranty period, do not disassemble or dismantle the product but contact our sales window to follow its instruction.
- (3) Do not reverse-engineer the product including disassemble or analyze without our approval.
- (4) The product is intended to be used for general electronic equipment such as general lighting, home appliances, and information-communication equipment.
It is not designed or manufactured to be used for special application
(eg. automobiles, trains, ships, airplanes, spaceships, submarine repeaters, atomic energy control systems, combustion equipment, life-support systems, safety devices).
We will not guarantee any application suitability for goods like those described above that require special quality and reliability.
In cases where the product is used in special applications and it causes an extensive property damage, threatens human life or damages the human body, we will not be held liable.
- (5) The product is not in conformity to ISO/TS16949 or intended to be used for in-vehicle application.
- (6) This specification will become void if it is not returned or if no purchase order is made within one year from the issued date.
- (7) We will not be liable for any disadvantage, damage or cause of legal action, or any other damage or loss that arise from the use or nonuse of technical information or data of this specification.
- (8) This technical information and data is provided for users as is, and Citizen Electronics Co., Ltd. does not guarantee that it is free from errors or defect in technical information and data, or this technical information and data conform to special applications, or this technical information and data does not infringe any rights of the user or third parties other than the user, or any other contents thereof.
- (9) Citizen Electronics Co., Ltd. reserves a right to modify technical information and data without notice.
- (10) When exporting our products, please ensure conformance with applicable laws and regulations and take appropriate actions such as obtaining an export license.
- (11) Please do not use or supply our products for any weapons of mass destruction (WMD) or for any other military purposes.
- (12) The contents of this document is not guaranteed because the specification and appearance of the product may change without notice for improvement.
Please exchange formal specifications with us when adopting the product for mass production.

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
								TYPE	CL-395S-E8-SD-T
					T.Mizuno	—	M.Hamada	Drawing No	—
—		Jun.2.26	Issue of the first edition	hamada					
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

SPECIFICATIONS

12/12

Reference

The information described (text, photos, images) is subject to copyright and is protected by law. Unauthorized copying or reproduction without Citizen Electronics' approval is prohibited by law except for "reproduction for personal use" or "quotation," which is allowed by the Copyright Law.



is a trademark or registered trademark of
Citizen Electronics Co., Ltd.

Leading the world's device technology

Products

- Lighting LED
- Chip LED
- Tactile switch



Application

- Mobile device
- Lighting device
- In-vehicle device
- Healthcare device
- Industrial device

CITIZEN ELECTRONICS CO., LTD.

〒403-0001

1-23-1 Kami-kurechi, Fujiyoshida, Yamanashi

TEL: 0555-23-4121

<http://ce.citizen.co.jp>

Inquiry about products

<https://form.citizen.co.jp/ce/e/support/product/form.php>

Products information

<http://ce.citizen.co.jp/productse/catalogue.php>

MODIFICATION HISTORY					APPROVED	CHECKED	DRAWN	MODEL	CITILED
								TYPE	CL-395S-E8-SD-T
					T.Mizuno	—	M.Hamada	Drawing No	—
—		Jun.2.26	Issue of the first edition	hamada					
MARK	QTY	DATE	DESCRIPTION	NAME	CITIZEN ELECTRONICS CO., LTD.				

Format No. OQP-0002-F38-I-E