

- {1} When adopting the product for mass production, please exchange formal specifications with us.
- {2} Do not reverse-engineer the product including disassemble or analyze without our approval.
- {3} The product is not in conformity to IATF16949 or intended to be used for in-vehicle application. The product is not designed or manufactured to be used for special application (e.g. trains, ships, airplanes, spaceships, submarine repeaters, atomic energy control systems, traffic equipment, combustion equipment, medical devices, and safety devices). We will not guarantee any application suitability for goods like those described above that require special quality and reliability. In cases where the product is used in special applications and it causes extensive property damage, threatens human life or damages the human body, we will not be held liable.
- {4} The specification and appearance of the product may change without notice for improvement, etc.
- {5} This technical information and data is provided for users as is, and we do not guarantee that it is free from errors or defect in technical information and data, or this technical information and data conform to special applications, or this technical information and data does not infringe any rights of the user or third parties other than the user, or any other contents (including changes in contents for improvement of the specification and appearance of the product) thereof.

マルチカラーLED Multi-color LED

# CL-421 Series

Distributeur : JBG-METAPIX

## ●絶対最大定格 Absolute Maximum Rating

(Ta 25℃)

| Product code | Color variation | P*1<br>(mW) | Pd<br>(mW) | IF<br>(mA) | IFP<br>(mA) | VR<br>(V) | Top<br>(℃) | Tst<br>(℃) |
|--------------|-----------------|-------------|------------|------------|-------------|-----------|------------|------------|
| CL-421C4     | Red             | 140         | 50         | 20         | 100*2       | 4         | -25~+80    | -30~+85    |
|              | Green           |             | 140        | 30         |             |           |            |            |
|              | Blue            |             | 130        | 30         |             |           |            |            |

\*1 Pは同時点灯時の全許容損失を示します。/ \*2 IFPの条件はduty 1/10、パルス幅0.1msecです。


\*1 P means total value of power dissipation when both colors are on. / \*2 Conditions for IFP are pulse of 1/10 duty and 0.1msec width.

## ●電氣的光学的特性 Electrical and Optical Characteristics

(Ta 25℃)

| Product code | Color variation | VF         |            |            | $\lambda_d$<br>typ<br>(nm) | Iv*        |              |              |
|--------------|-----------------|------------|------------|------------|----------------------------|------------|--------------|--------------|
|              |                 | IF<br>(mA) | typ<br>(V) | max<br>(V) |                            | IF<br>(mA) | min<br>(mcd) | typ<br>(mcd) |
| CL-421C4     | Red             | 20         | 2.2        | 2.78       | 624                        | 20         | 520          | 700          |
|              | Green           | 20         | 3.45       | 4.12       | 530                        | 20         | 850          | 1,350        |
|              | Blue            | 20         | 3.2        | 3.81       | 470                        | 20         | 250          | 400          |

\* NIST規格に準拠 \* Compliant with NIST standards




2.8(L) ×  
1.35(W) × 1.0(H)mm

## 特徴 Features

1. 同一パッケージで3色発光  
3 colors emitting from a single package
2. 側面発光  
Side-lighting type

## ●外形寸法図 Outline drawing

単位 Unit : mm

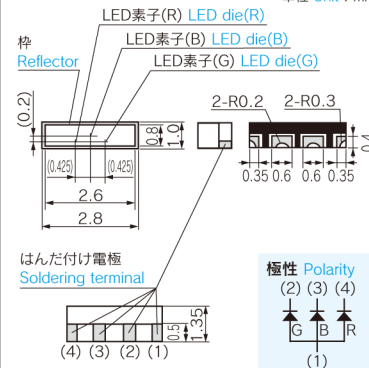

推奨はんだ付けパターン  
Recommendable  
soldering pattern

部品中心  
Center

(Top view)



包装数量: 3,000個/1リール (φ 180mm) Loaded quantity: 3,000pcs./1 reel (φ 180mm)

Introduction

CITILED

Technical  
note

Multi-color LED

High brightness  
white LED

General color  
LED