




1202 KSS Locking Wire Saddle



- Material: UL approved Nylon 66, 94V-2.
- Color: Natural
- Application: Pre-drill hole on chassis board and fix the wire saddle, lock the wire in saddle with fingertip pressure. Can directing and gathering cable in and direction.

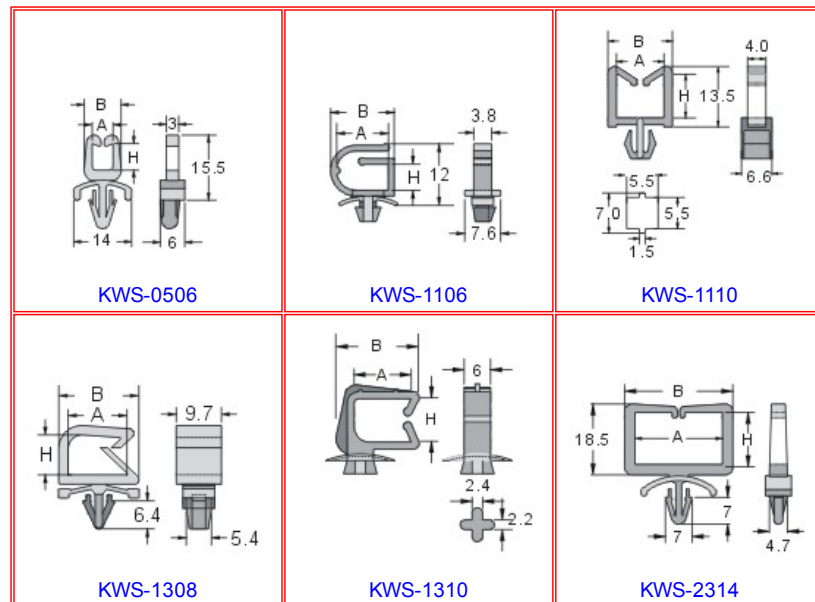

Unit: mm						
Item No.	Dimension			PCB		Packing
	H	A	B	hole	thickness	
☐ KWS-0506	5.4	5.0	9.0	4.8	3.0	100 pcs / Bag
☐ KWS-1106	5.4	10.5	13.0	4.8	1.6	
☐ KWS-1110	9.8	10.9	14.4	As Figure	2.2	
☐ KWS-1308	8.5	12.7	17.2	5.8	1.6	
☐ KWS-1310	9.9	13.0	18.8	As Figure	As Figure	
☐ KWS-2314	13.6	22.9	28.3	4.8	3.4	

Input Sample Order

Check Selected

Return All Selected



KAI SUH SUH ENTERPRISE CO., LTD.

- Last Updated 17 June 2020 -

