



1201 KSS WIRE SADDLE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural
- Application: Pre-drill 4.8mm hole PC board and fix the wire saddle, lock the wire in saddle with fingertip pressure. Can directing and gathering cable in any direction.

UNIT : mm

Item No.	Dimension				PCB		Packing
	L	W1	H1	H2	Mounting Hole M1	Thickness T1	
PWS-1013	4.8	17.8	10.4	13.8	4.8	2.3	100pcs
PWS-1715	5.0	16.7	23.0	15.0	4.8	2.4	

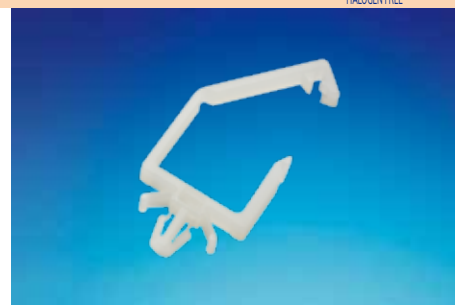

Wiring Ducts

Cable Markers

Cable Ties

Wrapping Bands

Cable Clamps & Tie Mounts

Glands, Bushings

Conduits

Bushings

Wire Connectors

Tubes

Cable Clips

PCB Parts

Fasteners



1201 KSS WIRE SADDLE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

Item No.	Dimension			PCB		Packing
	W1	H1	H2	Mounting Hole M1	Thickness T1	
PWS-2824	27.6	35.3	24	4.8	2.0	100pcs

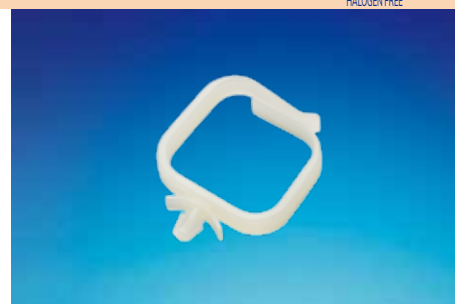

1202 KSS LOCKING WIRE SADDLE



- Material: UL94V-2 flame rated, UL approved Nylon 66.
- Color: Natural

UNIT : mm

Item No.	Dimension		PCB		Packing
	W1	H2	Mounting Hole M1	Thickness T1	
WS-1522	15.0	21.2	4.5	2.0	100pcs

