

Distributeur : JBG-METAFIX


E24SBWB1AE ESD Protection Diode

Features

- Low leakage current
- Low clamping voltage

PINNING

PIN	DESCRIPTION
1	Anode
2	Anode

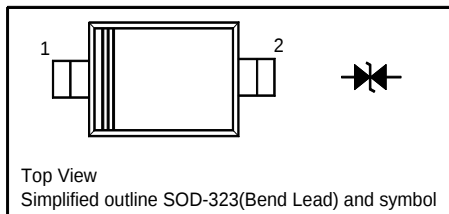

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20 \mu\text{s}$)	P_{PK}	145	W
Peak Pulse Current ($t_p = 8/20 \mu\text{s}$)	I_{PP}	3	A
ESD (IEC61000-4-2) Air Contact	V_{ESD}	± 18 ± 15	KV
Operation Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Working Peak Reverse Voltage	V_{RWM}	-	-	24	V
Reverse Breakdown Voltage at $I_R = 1 \text{ mA}$	$V_{(BR)R}$	26	-	32	V
Reverse Current at $V_{RWM} = 24 \text{ V}$	I_R	-	-	1	μA
Clamping Voltage at $I_{PP} = 3 \text{ A}$, $t_p = 8/20 \mu\text{s}$	V_C	-	-	60	V
Junction Capacitance at $V_R = 0 \text{ V}$, $f = 1 \text{ MHz}$	C_j	-	10	-	pF

Electrical Characteristic Curves

Fig 1. Pulse Waveform

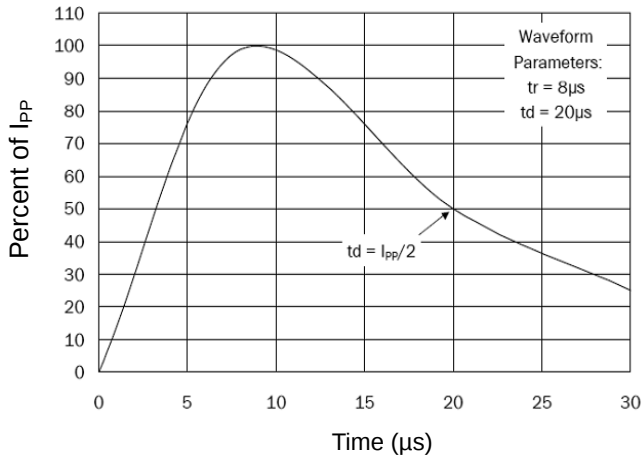


Fig 2. Power Derating Curve

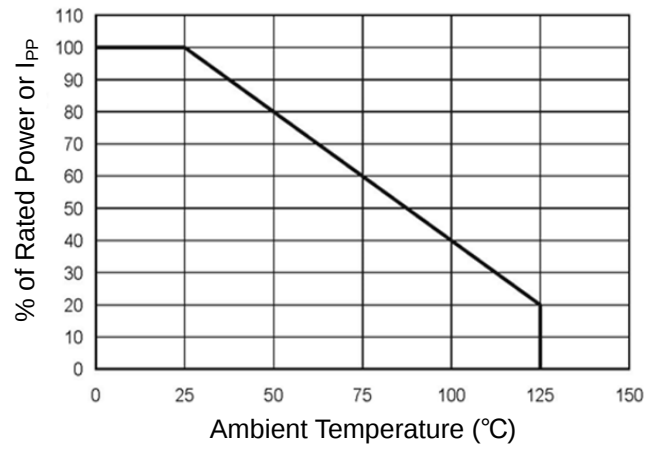


Fig 3. Clamping Voltage Curve

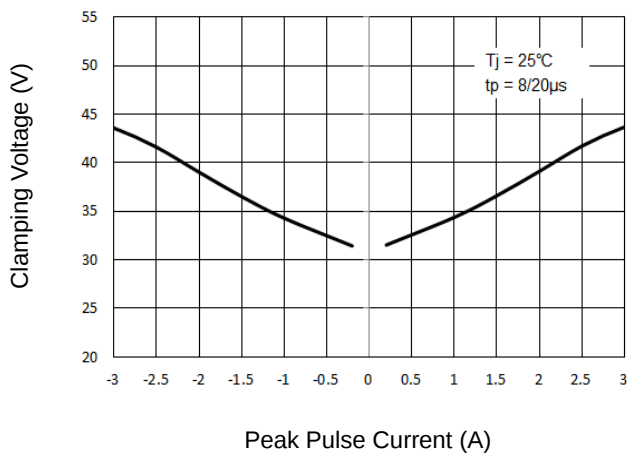


Fig 4. Junction Capacitance


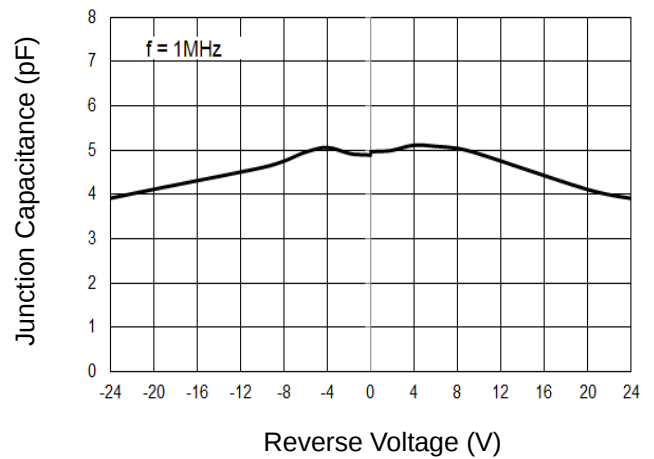



Fig. 5 TLP Curve

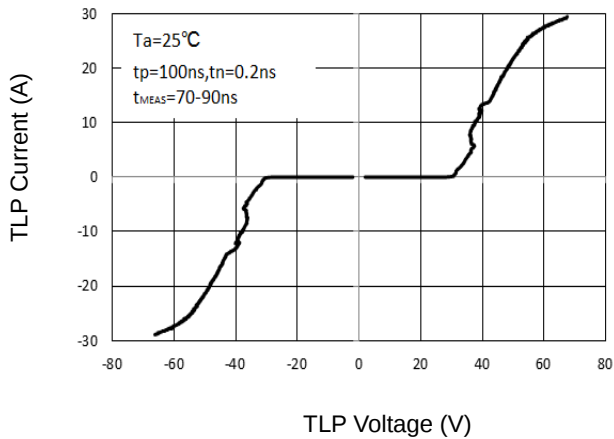

Distributeur : JBG-METAFIX


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

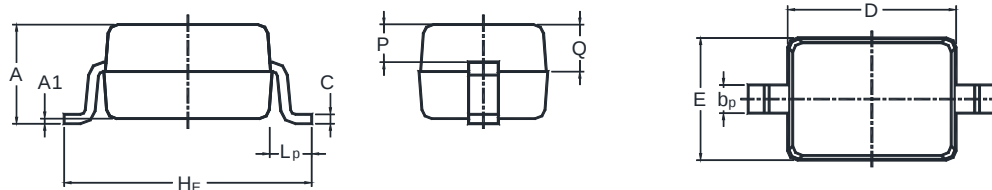SOD-323(Bend Lead)


UNIT	A	A ₁	b _p	C	D	E	H _E	L _p	Q	P
mm	1.1 0.8	0.1 0	0.4 0.25	0.18 0.09	1.8 1.6	1.35 1.15	2.8 2.3	0.5 0.1	0.5 0.3	0.4 0.3

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-323BL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Marking information

" P3R " = Part No.

" III " = Marking Line

Font type: Arial

