


SCHOTTKY BARRIER DIODE**FEATURES**

- Small Surface Mount device
- Low power loss, high efficiency
- High temperature soldering guaranteed: 260°C/10 seconds at terminals
- Guard ring for over voltage protection
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications

**SOD-123FL****MECHANICAL DATA**

- Case: SOD-123FL
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Weight: 0.0155 grams (approximate)

**MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)**

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	20	V
DC Reverse Voltage	V_R	20	V
RMS Reverse Voltage	V_{RMS}	14	V
Non-Repetitive Peak Forward Surge Current @ $t = 8.3\text{ ms}$	I_{FSM}	50	A
Mean rectifying current	I_F	2	A
Thermal Resistance From Junction To Ambient	$R_{\theta JA}$	85	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +175	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Max	Unit	Conditions
Forward voltage	V_F		0.50	V	$I_F = 2\text{A}$
Reverse current $T = 25^\circ\text{C}$	I_R		0.50	mA	$V_R = 20\text{V}$
Reverse current $T = 100^\circ\text{C}$	I_R		20	mA	$V_R = 20\text{V}$
Junction capacitance	C_J		160	pF	$V = 4\text{V}, f = 1\text{MHz}$

SCHOTTKY BARRIER DIODE**Typical Characteristics**

FIG.1 FORWARD CURRENT DERATING CURVE

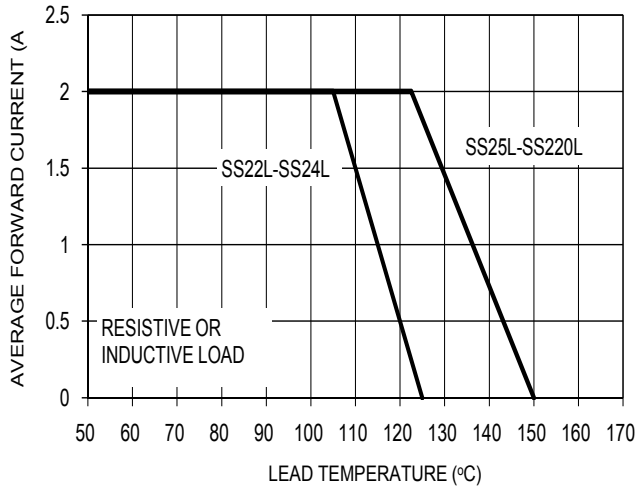


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

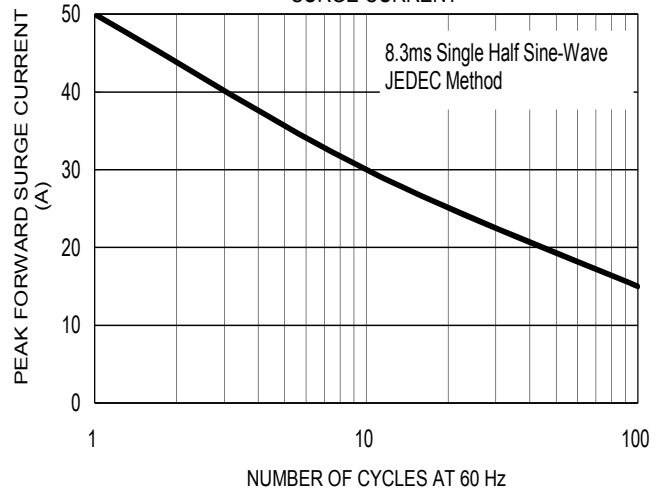


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

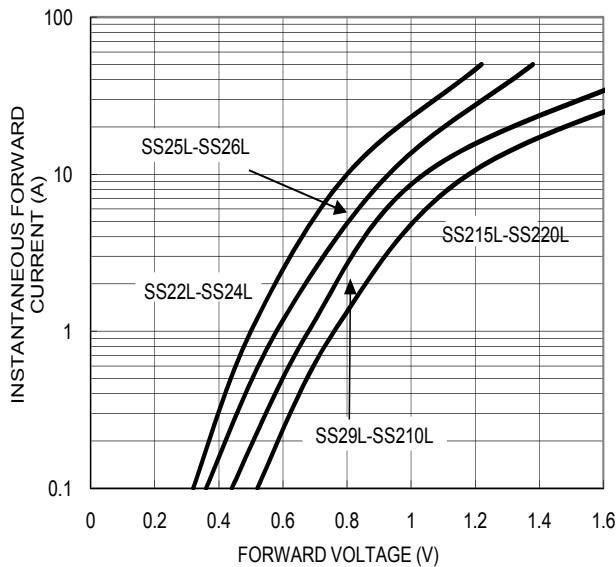


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

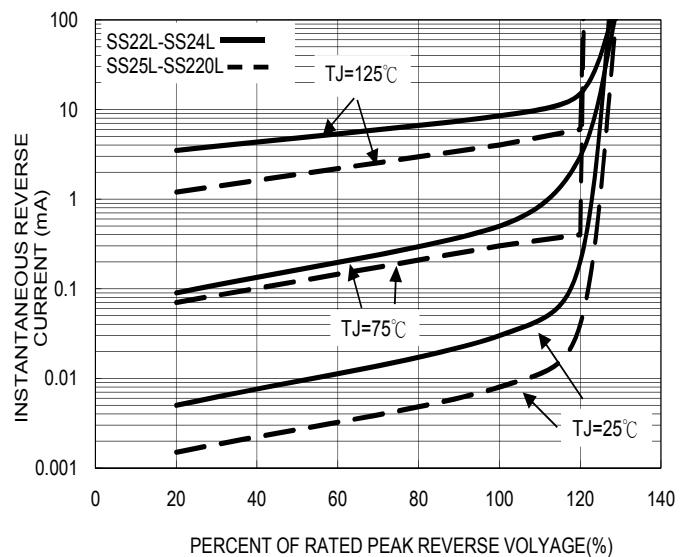


FIG. 5 TYPICAL JUNCTION CAPACITANCE



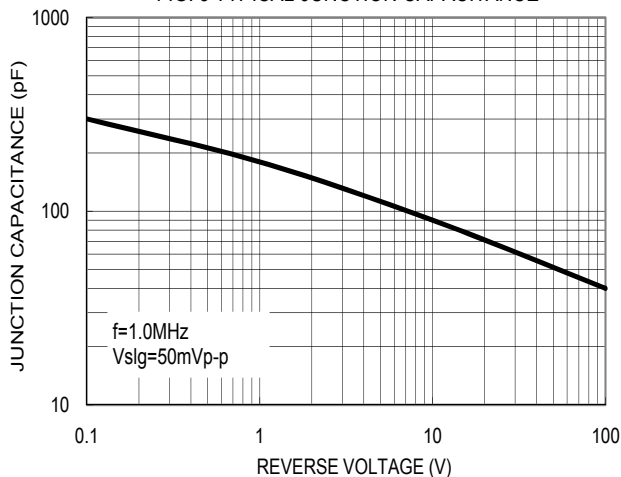


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE

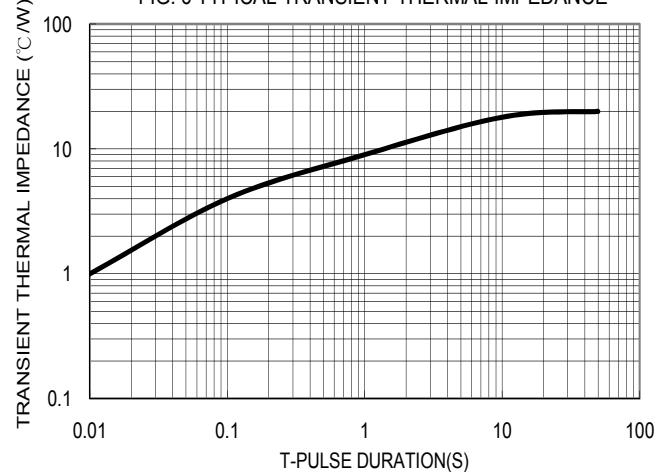


SCHOTTKY BARRIER DIODE

SOD-123FL Package Outline Dimensions

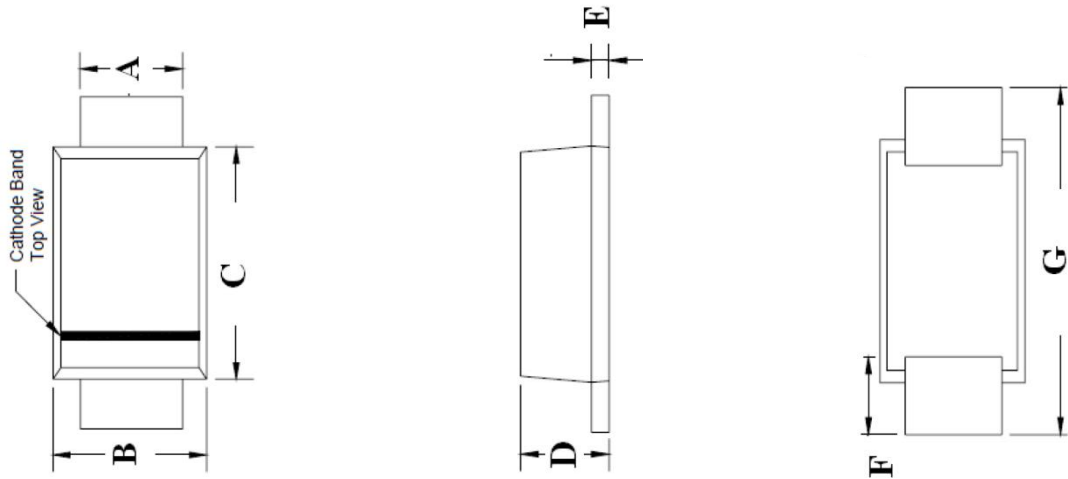

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.75	0.95	0.029	0.037
B	1.60	2.00	0.063	0.079
C	2.60	3.00	0.103	0.119
D	0.90	1.20	0.036	0.047
E	0.12	0.22	0.005	0.009
F	0.8Typ		0.032Typ	
G	3.50	3.90	0.138	0.159

SOD-123FL Suggested Pad Layout

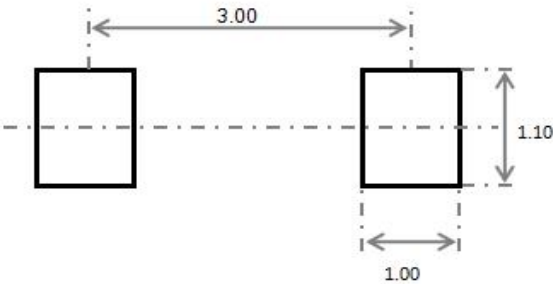


- Note:**
- 1. Controlling dimension: in millimeters
 - 2. General tolerance: $\pm 0.05\text{mm}$
 - 3. The pad layout is for reference purposes only

SCHOTTKY BARRIER DIODE


SOD-123FL Tape and Reel

SOD-123FL Embossed Carrier Tape

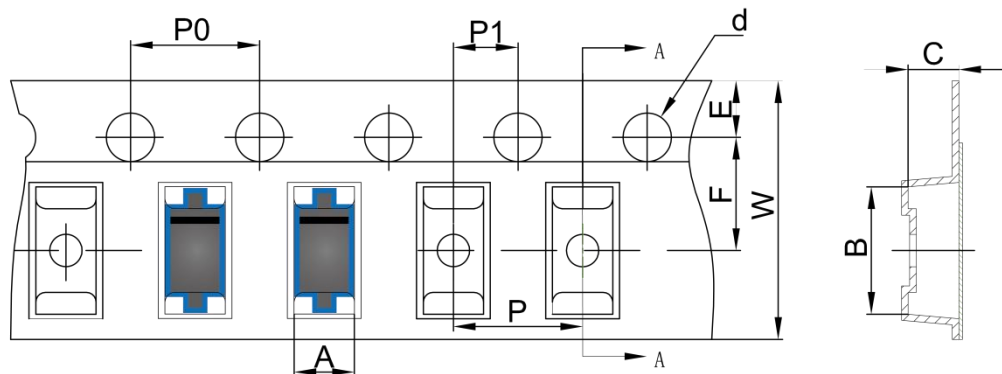


DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
SOD-123FL	2.10	4.00	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

SOD-123FL Tape Leader and Trailer

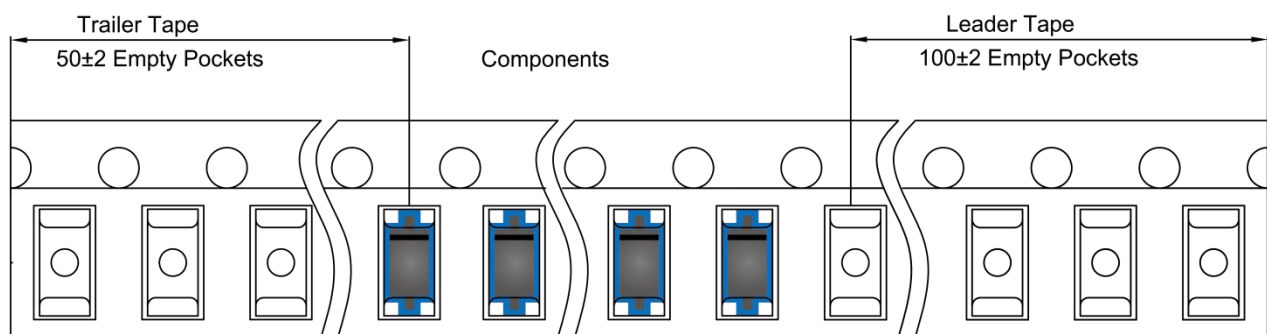

SOD-123FL Reel

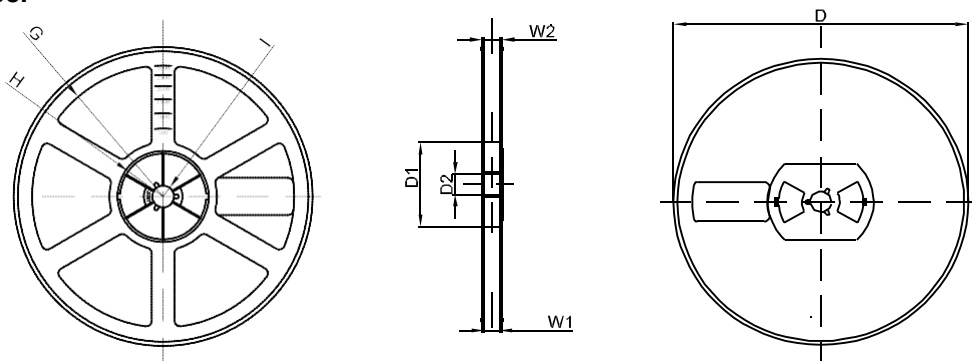

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
7" DIA	Ø178	54.40	13.00	R78	R25.60	R6.50	9.50	12.30
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1